




# Canvas Specifications

2022

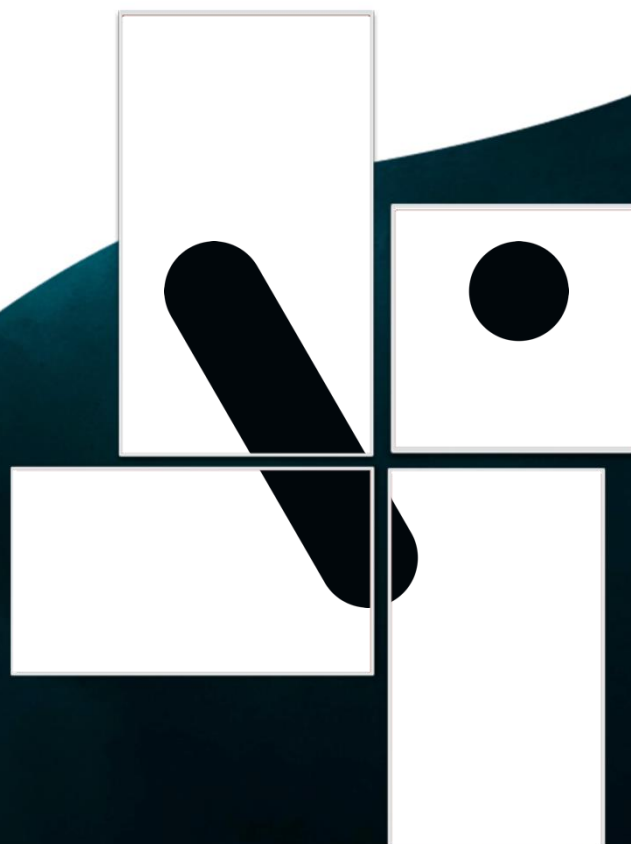

## V2 - Canvas

GENERAL	
Description	Indoor Canvas
DISPLAY	
Active Display Area	230.04mm x 408.96mm [9.06in x 16.10in]
Resolution	1920 x 1080
Brightness	430 NITS
Surface Treatment	5% Haze
Color Gamut	72% NTSC
TECHNOLOGY	
Processor	DPC430 – 16GB onboard storage
Wi-Fi	802.11 g/n/ac @ 2.4/5GHz
Bluetooth	BT 4.0
NFC	Yes (@13.56MHz)
POWER	
Input	100-240 VAC
Consumption (typ)	25W
ENVIRONMENT	
Operating Temp.	0C to 40C
Operating Humidity	0-90% RH (non-condensing)
CERTIFICATION & COMPLIANCE	
Safety	UL, CSA, CB
EMI/EMC	FCC Class B, IC, CE
SIZING	
Bezel Width	13mm (0.51in)
Thickness	16mm (0.6in)
Weight	2.9kg (6.40lbs)

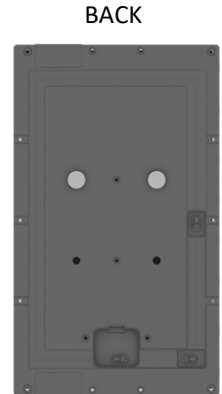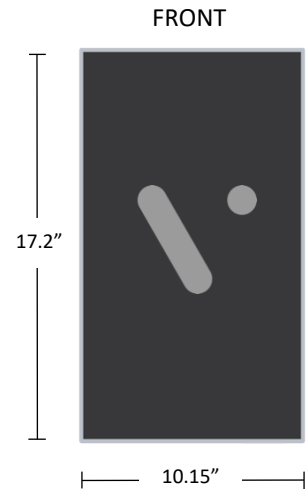

### In the box:



Wall Cleat



Videri Cable



Mounting Hardware





Power Adaptor 90W



## VQ - Canvas

GENERAL	
Description	Indoor Canvas
DISPLAY	
Active Display Area	475.8mm x 475.8mm [18.73in x 18.73in]
Resolution	1920 x 1080
Brightness	450 NITS
Surface Treatment	25% Haze
Color Gamut	92% NTSC
TECHNOLOGY	
Processor	DPC430 – 16GB onboard storage
Wi-Fi	802.11 g/n/ac @ 2.4/5GHz
Bluetooth	BT 4.0
NFC	Yes (@13.56MHz)
POWER	
Input	100-240 VAC
Consumption (typ)	52W
ENVIRONMENT	
Operating Temp.	0C to 40C
Operating Humidity	0-90% RH (non-condensing)
CERTIFICATION & COMPLIANCE	
Safety	UL, CSA, CB
EMI/EMC	FCC Class B, IC, CE
SIZING	
Bezel Width	11.1mm (0.44in)
Thickness	14.0mm (0.55in)
Weight	4.4kg (9.8lbs)

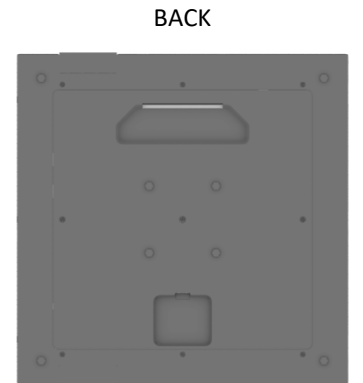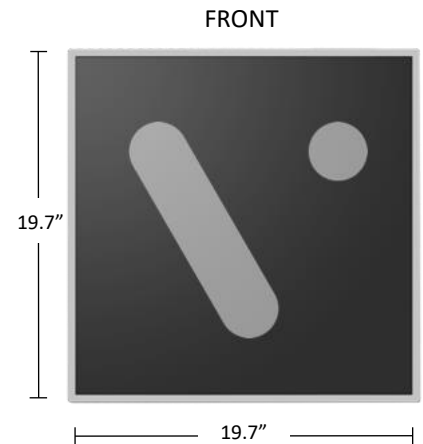

### In the box:



Wall Cleat



Videri Cable



Mounting Hardware





Power Adaptor 90W



## V3 - Canvas

GENERAL	
Description	Indoor Canvas
DISPLAY	
Active Display Area	392.9mm x 698.4mm [15.7in x 27.50in]
Resolution	1920 x 1080
Brightness	450 NITS
Surface Treatment	2% Haze
Color Gamut	72% NTSC
TECHNOLOGY	
Processor	DPC430 – 16GB onboard storage
Wi-Fi	802.11 g/n/ac @ 2.4/5GHz
Bluetooth	BT 4.0
NFC	Yes (@13.56MHz)
POWER	
Input	100-240 VAC
Consumption (typ)	55W
ENVIRONMENT	
Operating Temp.	0C to 40C
Operating Humidity	0-90% RH (non-condensing)
CERTIFICATION & COMPLIANCE	
Safety	UL, CSA, CB
EMI/EMC	FCC Class B,CE
SIZING	
Bezel Width	11.5mm (0.45in)
Thickness	13.3mm (0.52in)
Weight	5.5kg (12lbs)

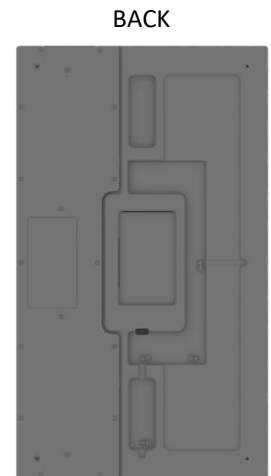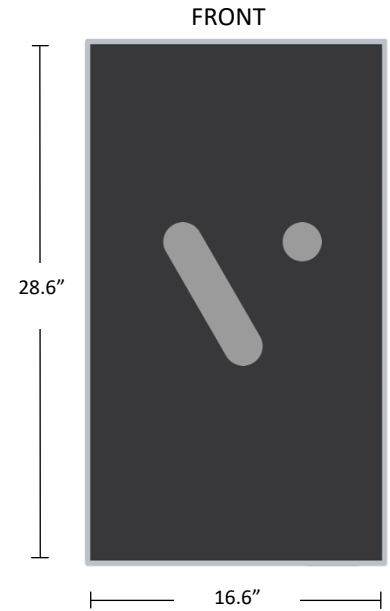

### In the box:



Wall Cleat



Videri Cable



Mounting Hardware





Power Adaptor 90W



## V4 - Canvas

GENERAL	
Description	Indoor Canvas
DISPLAY	
Active Display Area	480.33mm x 853.92mm [18.91in x 33.63in]
Resolution	1920 x 1080
Brightness	450 NITS
Surface Treatment	2% Haze
Color Gamut	72% NTSC
TECHNOLOGY	
Processor	DPC430 – 16GB onboard storage
Wi-Fi	802.11 g/n/ac @ 2.4/5GHz
Bluetooth	BT 4.0
NFC	Yes (@13.56MHz)
POWER	
Input	100-240 VAC
Consumption (typ)	80W
ENVIRONMENT	
Operating Temp.	0C to 40C
Operating Humidity	0-90% RH (non-condensing)
CERTIFICATION & COMPLIANCE	
Safety	UL, CSA, CB
EMI/EMC	FCC Class B,CE
SIZING	
Bezel Width	9.2mm (0.36in)
Thickness	12.7mm (0.5in)
Weight	9.0kg (19.9lbs)

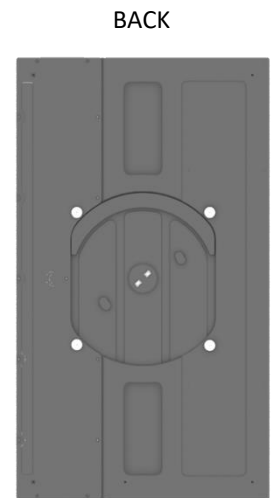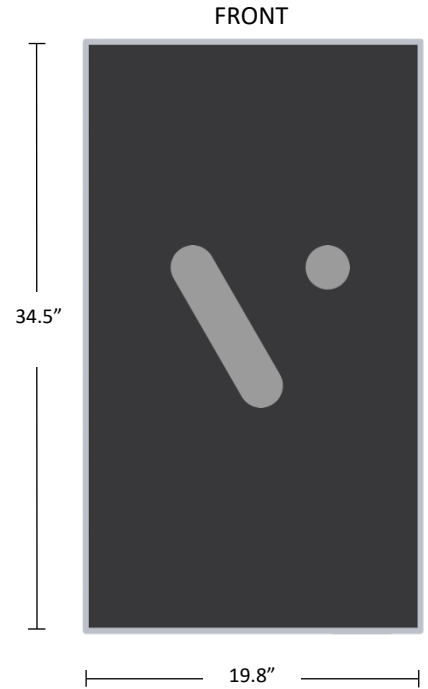

### In the box:



Wall Cleat



Mounting Hardware





Power Adaptor 120W



## V5 - Canvas

GENERAL	
Description	Indoor Canvas
DISPLAY	
Active Display Area	604.0mm x 1073.78mm [23.78in x 42.27in]
Resolution	1920 x 1080
Brightness	450 NITS
Surface Treatment	2% Haze
Color Gamut	72% NTSC
TECHNOLOGY	
Processor	DPC430 – 16GB onboard storage
Wi-Fi	802.11 g/n/ac @ 2.4/5GHz
Bluetooth	BT 4.0
NFC	Yes (@13.56MHz)
POWER	
Input	100-240 VAC
Consumption (typ)	84W
ENVIRONMENT	
Operating Temp.	0C to 40C
Operating Humidity	0-90% RH (non-condensing)
CERTIFICATION & COMPLIANCE	
Safety	UL, CSA, CB
EMI/EMC	FCC Class B,CE
SIZING	
Bezel Width	9.2mm (0.36in)
Thickness	12.7mm (0.5in)
Weight	11.1kg (24.5lbs)

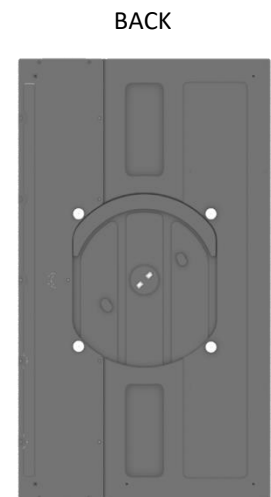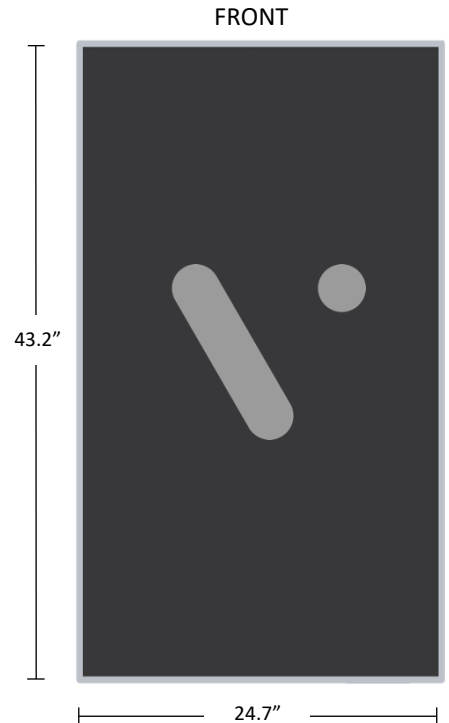

### In the box:



Static Mount



Mounting Hardware



Power Adaptor 120W

